


Technical data sheet: Heating cable PV

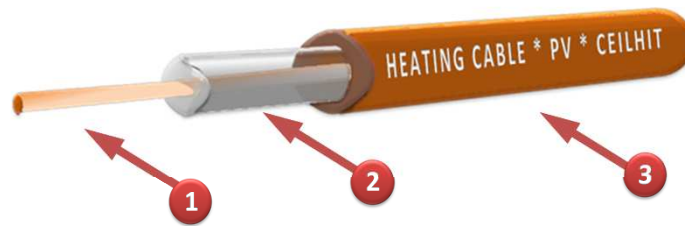

- CONSTRUCTION:

- 1 Cable core : Metallic solid resistance wire (Single core)
- 2 First insulation – Cross linked polyethylene (XLPE)
- 3 Jacket : PVC therm resistant 105°C - 0,8 mm thickness

- CHARACTERISTICS:

- Resistance range from 30 to 0,04 ohm/m
- External diameter from 3,8 to 4,5 mm
- Jacket colour : Orange
- Self-extinguishing
- Maximum power loading 33 W/m
- Operating Voltage : 230 V

- HOMOLOGATION:

- IEC 60800 – APPLUS nº 23008146

- APPLICATIONS:

- Underfloor heating

- STANDARD RANGES:

- Circuits : 17 W/m

